

IndustrialLink® (3 1/2" x 5" mesh — semi-privacy)



IndustrialLink® fence is built using the same materials and specifications as **PrivacyLink®**, except for the slats. We insert and staple the Industrial Slats into the chain link at our factory so that you don't have to insert them by hand on the job site. They provide about 75 percent privacy (based on wire/mesh used-stretch tension), and they are an excellent choice in fencing for a boundary and security.

Benefits:

- Factory inserted slats
- Superior privacy
- Cost-efficient solution for most settings
- Less installation time saves labor costs
- Low Maintenance
- Effective wind screen
- Enhances the appearance of the property
- Acts as exceptional sound barrier
- Virtually theft resistant
- Virtually unclimbable

Heavy-duty HDPE Slats

IndustrialLink® features strong and durable double wall slats "factory inserted" into the wire mesh. Choose from a wide variety of colors and styles. There's something just right for whatever your needs might be.

Galvanized Chain Link Fencing

We fabricate our chain link mesh using only the highest grade 9 or 10 gauge galvanized wire. Our state-of-the-art manufacturing process ensures a consistent weave and product quality.

Vinyl Coated Chain Link Fencing

We also offer a fused and bonded vinyl coated chain link mesh that is color coordinated to seven of our standard slat colors. And, we guarantee it for years of trouble-free use.

ASTM Designations

Meets ASTM Designations (see chart on the next page)



Technical Data

Industrial Link® Specifications	
Wind load and privacy factor - approximately (Based on wire/mesh used-stretch tension)	75%
3 1/2" x 5" Mesh	✓
Manufactured up to 16' high	✓
Available in 9 gauge galvanized before weaving (GBW) per ASTM A392 and A817, Type II, class IV wire (1.20 oz.)	✓
Available in 10 gauge galvanized before weaving (GBW) per ASTM A392 and A817, Type II, class IV wire (1.20 oz.)	✓
Available in 9 gauge galvanized before weaving (GBW) per ASTM A392 and A817, Type II, class V wire (2.0 oz.)	✓
Available in 9 gauge finish 10 gauge core fused & bonded vinyl coated wire per ASTM F668, class 2B - 7 colors available	✓
Available in 8 gauge finish 9 gauge core fused & bonded vinyl coated wire per ASTM F668, class 2B - 7 colors available	✓
Available in 9 gauge aluminized before weaving wire per ASTM A491, Type 1	✓
Double wall slats with staples	✓
Slats meet ASTM F3000 and F3000M designations	✓
Available in a 25' roll 5' minimum increments thereafter	✓
Fifteen year pro-rata limited warranty	✓


Standard Wire Colors



Standard Slat Colors



Colors are approximations. Exact representation of colors in printing is difficult. Please refer to actual color samples for accurate matching. **Samples available upon request.**

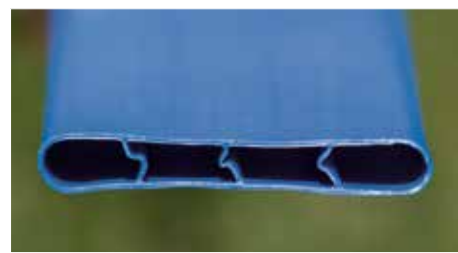

IndustrialLink®'s double wall slats with three center support legs fit snugly into the galvanized steel or vinyl coated chain link mesh to provide 75% or semi privacy. They make an exceptional boundary for industrial and business complexes as well as providing outstanding security and beauty.



MADE IN USA

HDPE Technical Properties

Property	Values
Melt Index	(.35) Optimum extrusion processing conditions for Fence Slats
Density	(.945) Polyethylene ranges anywhere from .914 to .960 in density
Minimum Temp.	(-70° F) Under no stress, HDPE remains flexible at this temperature
Maximum Temp.	(180° F) Under no stress, HDPE will not distort at this temperature
Strength	(4,000 psi) HDPE will not distort at lesser loads or impacts



YOUR TOTAL FENCING SOURCE

COMMERCIAL, INDUSTRIAL & RESIDENTIAL FENCE PRODUCTS AND ACCESSORIES FOR THE FENCE PROFESSIONAL!

1.800.574.1076 • www.eprivacylink.com