



## Bottom Locking Double Wall Slats

*Bottom Locking Double Wall Slats are an economical and attractive way to enhance any chain link fence. The bottom locking design makes this one of the easiest slats to install and assures a clean level finish.*

**Design** – Flat tubular shape with inside reinforced “legs” for extra durability. The locking channel creates a “snap-in” locking effect for security and deters vandalism.

**Installation** – Insert the locking channel horizontally through the bottom of the fence, then simply slide the slats vertically from the top towards the bottom channel and they will automatically lock into place.

**Standard Chain Link Fence Heights** – 4 ft., 5 ft., 6 ft., 7 ft., 8 ft., 10 ft., and 12 ft. (*Special heights available upon request*)

**Slat Length** – 3 1/2” shorter than the standard chain link fence height

**Wind Load and Privacy Factor** – Approximately 75% (*Based on wire/mesh used-stretch tension*)

**Limited Warranty** – 25 years pro-rata

### Features and Benefits

**Materials** – *SlatSource*® slats are extruded from High-Density Polyethylene (HDPE), color pigments and ultraviolet (UV) inhibitors specially formulated to retard the harmful effects of the sun and lengthen the life of the slats.

**Durability** – Our slats are also resistant to severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

**Maintenance** – Our slats are nearly maintenance free. They may be pressure cleaned of surface contaminants with plain water.


**Wind Load Disclaimer** – We will not be held responsible for fence damage resulting from wind load conditions due to insufficient structural support.

**Designations** – Meets ASTM Designation: F3000/F3000M

### Specifications

Slat Name	Slat Width	Mesh Size	Wire Gauge	Coverage Area
Bottom Lock 2”	1 3/32”	2”	8, 9 or 11	10 linear feet
Bottom Lock 2 1/4”	1 1/4”	2 1/4”	11 1/2 or 12	10 linear feet
Bottom Lock 1 3/4”	7/8”	1 3/4” 2”	8, 9, or 11 6	10 linear feet

### Available Colors (colors are approximations)

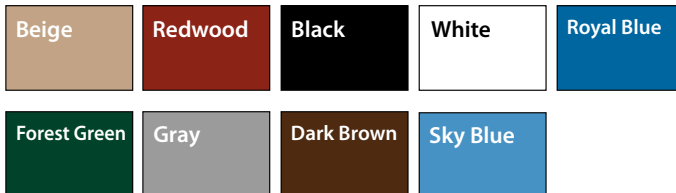

*Exact representation of colors in printing is difficult. Please refer to actual color samples for accurate matching. **Samples available upon request.***

### HDPE Technical Properties

Property	Values
Melt Index	(.35) Optimum extrusion processing conditions for Fence Slats
Density	(.945) Polyethylene ranges anywhere from .914 to .960 in density
Minimum Temp.	(-70° F) Under no stress, HDPE remains flexible at this temperature
Maximum Temp.	(180° F) Under no stress, HDPE will not distort at this temperature
Strength	(4,000 psi) HDPE will not distort at lesser loads or impacts



**MADE IN USA**



**A PrivacyLink® Company**

**1.888.806.7528**  
[www.eprivacylink.com](http://www.eprivacylink.com)  
[info@eprivacylink.com](mailto:info@eprivacylink.com)

*Many patents and patents pending.*