

## Fin2000 Slats

**Patented**

*When you need extra privacy for commercial or industrial applications, our Fin2000 is the answer. This uniquely styled, patented slat can be purchased by the bag or pre-inserted into the chain link wire during the weaving process.*

**Design** – Flat tubular plastic with fins for added privacy.

**Durability** – The Fin2000 is resistant to severe weather conditions, salt, water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

**Installation** – Insert the slats vertically into the fence from top to bottom. No tools are necessary. The wings grip the knuckles of the wire mesh securing the slat in place.

**Standard Chain Link Fence Heights** – 4 ft., 5 ft., 6 ft., 7 ft., 8 ft. 10 ft., and 12 ft. (*Special heights available upon request*)

**Slat Length** – 1” shorter than the standard chain link fence height

**Upon Special Request** – Available in bags that cover 25 linear feet for hand installation jobs.

**Wind Load and Privacy Factor** – Approximately 98% (*Based on wire/mesh used-stretch tension*)

**Limited Warranty** – 25 years pro-rata

### Features and Benefits

**Materials** – **SlatSource**® slats are extruded from High-Density Polyethylene (HDPE), color pigments and ultraviolet (UV) inhibitors specially formulated to retard the harmful effects of the sun and lengthen the life of the slats.

**Durability** – Our slats are also resistant to severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

**Maintenance** – Our slats are nearly maintenance free. They may be pressure cleaned of surface contaminants with plain water.


**Wind Load Disclaimer** – We will not be held responsible for fence damage resulting from wind load conditions due to insufficient structural support.

**Designations** – Meets ASTM Designation: F3000/F3000M

### Specifications

Slat Name	Slat Width	Mesh Size	Wire Gauge	Coverage Area
Fin2000	2 13/16"	3 1/2 x 5"	8, 9, or 10	25 Linear feet

### Available Colors (colors are approximations)

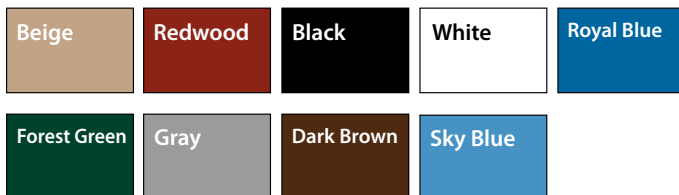

*Exact representation of colors in printing is difficult. Please refer to actual color samples for accurate matching. **Samples available upon request.***

### HDPE Technical Properties

Property	Values
Melt Index	(.35) Optimum extrusion processing conditions for Fence Slats
Density	(.945) Polyethylene ranges anywhere from .914 to .960 in density
Minimum Temp.	(-70° F) Under no stress, HDPE remains flexible at this temperature
Maximum Temp.	(180° F) Under no stress, HDPE will not distort at this temperature
Strength	(4,000 psi) HDPE will not distort at lesser loads or impacts



**MADE IN USA**



**A PrivacyLink® Company**

**1.888.806.7528**

[www.eprivacylink.com](http://www.eprivacylink.com)

[info@eprivacylink.com](mailto:info@eprivacylink.com)

*Many patents and patents pending.*