

FLAT NOODLE LINK™ (2" mesh - semi privacy)

Patent Pending




FLAT NOODLE LINK™ is a 2-inch chain link fence with "**Factory Inserted™**" double-wall slats tightly secured by a flat noodle locking strip. And since the fence comes with the slats already in the wire, it eliminates entirely the need for you to insert the slats or the locking strip by hand into the chain link fence.

FLAT NOODLE LINK™ significantly reduces lost revenue, saves time and money because it is faster and easier to install than most other chain link fence, and it makes an exceptional boundary around residential and business properties.



2-inch Chain Link Fence with "Factory Inserted Slats™" and Flat Noodle Already locked and in the wire!

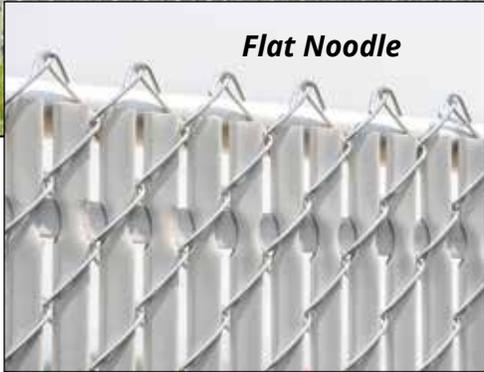

FLAT NOODLE LINK™ is a sturdy 2-inch chain link fence that features double-wall slats inserted into the fence at the factory. It provides approximately 75% privacy.

It is available in several wire weights and finishes, slat colors and heights. It meets ASTM designations, and we guarantee it.



Reduce lost revenue and increase profits with Noodle Link™!

Technical Data

FLAT NOODLE LINK™ Specifications	
Double-wall factory inserted slats	✓
Wind load and privacy factor - approximately (Based on wire/mesh used-stretch tension)	75%
2" x 2" Mesh	✓
Manufactured up to 12' high	✓
Available in 9 gauge galvanized before weaving (GBW) per ASTM A392 and A817, Type II, class IV wire (1.20 oz.)	✓
Available in 11 gauge galvanized before weaving (GBW) per ASTM A392 and A817, Type II, class IV wire (1.20 oz.)	✓
Available in 9 gauge galvanized before weaving (GBW) per ASTM A392 and A817, Type II, class V wire (2.0 oz.)	✓
Available in 9 gauge finish 10 gauge core fused & bonded vinyl coated wire per ASTM F668, class 2B - 7 colors available	✓
Available in 8 gauge finish 9 gauge core fused & bonded vinyl coated wire per ASTM F668, class 2B - 7 colors available	✓
Available in 9 gauge aluminized before weaving wire per ASTM A491, Type 1	✓
Slats meet ASTM F3000 and F3000M designations	✓
Available in a 25' roll	✓
5' minimum increments after that	✓
Fifteen year pro-rata limited warranty	✓

Color Coordinated Noodles

We offer the noodles in 7 vibrant colors plus standard silver which matches galvanized wire. Now you can coordinate the color of the slats with the color of the noodle and the vinyl coated wire to create an attractive, colorful fence (the color of the noodle and the wire is always the same - black noodle - black wire, redwood noodle - redwood wire, etc.).

Available Noodle/Wire Colors



Available Slat Colors



Colors are approximations. Exact representation of colors in printing is difficult. Please refer to actual color samples for accurate matching. **Samples available upon request.**

All Noodle Link™ products are available in any combination of knuckle and twist selvage.



HDPE Technical Properties

Property	Values
Melt Index	(.35) Optimum extrusion processing conditions for Fence Slats
Density	(.945) Polyethylene ranges anywhere from .914 to .960 in density
Minimum Temp.	(-70° F) Under no stress, HDPE remains flexible at this temperature
Maximum Temp.	(180° F) Under no stress, HDPE will not distort at this temperature
Strength	(4,000 psi) HDPE will not distort at lesser loads or impacts



YOUR TOTAL FENCING SOURCE

COMMERCIAL, INDUSTRIAL & RESIDENTIAL FENCE PRODUCTS AND ACCESSORIES FOR THE FENCE PROFESSIONAL!

1.800.574.1076 • www.eprivacylink.com

Flat Noodle Link™ Installation Instructions

Assemble the frame work, top rail, loop caps, etc.

Step 1



Insert the needle and connect the rolls of Flat Noodle Link the same as regular chain link fence. Stand the fence up to the posts and top rail, loosely attach to the top rail with ties. Attach tension bar and stretch wire into place. **Do not cut the Flat Noodle until you have stretched the wire.**

Step 3



Hog ring the overlapped Flat Noodles together to prevent the them from moving.

Caution: If you trim the Flat Noodle before stretching the wire, you may end up with not enough Flat Noodle.

Step 2



How to install the three (3) extra slats in place between spliced sections: Cut the 8" Flat Noodle tail off the end of the roll. Insert one slat at a time while feeding the Flat Noodle tail into place until all three slats are inserted. Make sure the Flat Noodle from the tail overlaps the other Flat Noodle where the extra slats were installed.



YOUR TOTAL FENCING SOURCE

COMMERCIAL, INDUSTRIAL & RESIDENTIAL FENCE PRODUCTS
AND ACCESSORIES FOR THE FENCE PROFESSIONAL!

1.800.574.1076 • www.eprivacylink.com