

Winged Slats®

Winged Slat® provides increased privacy over most other slats. These self-locking slats (no locking channels are needed) combine the proven quality and durability of our standard slats with unique "wings" for extra screening and security. This uniquely styled, patented slat can be purchased by the bag or pre-inserted into the chain link wire during the weaving process.

Design – Includes a rigid, flat tubular body with inside "legs" for extra support. These flexible and resilient wing portions are positioned on each side of the slat body. Serrations are added to the wings for easier installation and locking power.

Installation – Insert the slats vertically into the fence from top to bottom. No tools are necessary. The serrated wings grip the knuckles of the wire mesh securing the slat in place.

Standard Chain Link Fence Heights – 4 ft., 5 ft., 6 ft., 7 ft., and 8 ft. For heights exceeding 7 feet, we recommend using (2) two half sizes (i.e. for 10 foot fence use two 5 foot slats) (*Special heights available upon request*)

Slat Length – 2" shorter than the standard chain link fence height

Wind Load and Privacy Factor – Approximately 95% (*Based on wire/mesh used-stretch tension*)

Limited Warranty – 25 years pro-rata

Features and Benefits

Materials – *SlatSource®* slats are extruded from High-Density Polyethylene (HDPE), color pigments and ultraviolet (UV) inhibitors specially formulated to retard the harmful effects of the sun and lengthen the life of the slats.

Durability – Our slats are also resistant to severe weather conditions, salt water, sand, road dirt, most acids, alcohol, alkaline, ammonia, petroleum distillates, and common environmental pollutants.

Maintenance – Our slats are nearly maintenance free. They may be pressure cleaned of surface contaminants with plain water.


Wind Load Disclaimer – We will not be held responsible for fence damage resulting from wind load conditions due to insufficient structural support.

Designations – Meets ASTM Designation: F3000/F3000M

Specifications

Slat Name	Slat Width	Mesh Size	Wire Gauge	Coverage Area
Winged Slat	1 7/16"	2"	9	10 Linear feet

Available Colors (colors are approximations)

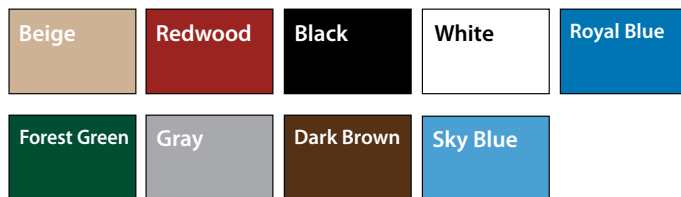

Exact representation of colors in printing is difficult. Please refer to actual color samples for accurate matching. **Samples available upon request.**

HDPE Technical Properties

Property	Values
Melt Index	(.35) Optimum extrusion processing conditions for Fence Slats
Density	(.945) Polyethylene ranges anywhere from .914 to .960 in density
Minimum Temp.	(-70° F) Under no stress, HDPE remains flexible at this temperature
Maximum Temp.	(180° F) Under no stress, HDPE will not distort at this temperature
Strength	(4,000 psi) HDPE will not distort at lesser loads or impacts



MADE IN USA



A PrivacyLink® Company

1.888.806.7528
www.eprivacylink.com
info@eprivacylink.com

Many patents and patents pending.